



MXL V67GS

Condenser Microphone

Studio Edition

Marshall Electronics, Inc.
 1910 East Maple Ave. El Segundo, CA 90245
 Phone: (310) 333-0606 Fax: (310) 333-0688
 E-mail: Sales@mxlmics.com
 Internet: www.MXLmics.com

Thank you for purchasing the MXL V67GS Condenser Microphone. With proper care, this mic will provide many years of satisfaction. For best results, please take a few moments to review this literature.

General Characteristics

This microphone has a 32mm gold sputtered capsule and a fairly wide fixed cardioid pickup pattern. In addition, it features switches for both pre-attenuation (pad) and high pass filter (bass roll off). Large capsule condensers are very sensitive, readily revealing very subtle sonic details. They also tend to pick up sounds outside the pattern more than some designs, which can lead to powerful feedback if you are not careful. We strongly advise experimentation with placement and isolation requirements with the gain initially set low to avoid equipment (and ear) damaging surprises!

Power Requirements

IMPORTANT - This unit requires phantom power at 48 volts, +/- 4 volts. Each unit has been thoroughly checked before shipping, so if you hear no sound, check that the phantom power on your mixer or separate power supply is switched on!

Isolation Mount

The optional MXL57 shock mount can shift in shipment. Simply shift the nylon bands to center the microphone in the assembly. Be sure that the wire clamp does not rest on the chassis of the mount, as this impairs mechanical isolation. Slide the mount all the way to the rim of the microphone for the most secure hold.

Microphone Cables

The microphone cable can have a profound effect on the sound of any microphone. Even the finest microphones will sound poor if the interconnect cable allows noise to enter, or causes distortion and loss of information. We recommend the use of Mogami Gold Studio microphone cables.


Care

Dust and foreign material can degrade the performance of a microphone over time so always store the unit in its case. For vocals closer than 3", use a "popper stopper" or a foam windscreen to avoid getting moisture on the diaphragm as this can substantially degrade the microphone's performance. Store the microphone in its original packaging, or the included zipper pouch.


V67GS Specifications

Type:	Pressure gradient condenser mic
Capsule:	32mm gold sputtered capsule
Frequency Response:	30Hz - 20kHz
Polar pattern:	Cardioid
Sensitivity:	22 mV/Pa (-33 dB re 1V/Pa)
Impedance:	200 ohms
Output:	Transformer-balanced
Pre-attenuation:	0 dB, -6 dB
High Pass Filter:	(Bass Roll off) 6 dB/octave @ 150Hz
Equivalent noise:	20 dB (A-weighted IEC 268-4)
S/N Ratio:	78 dB (Ref. 1 Pa A-weighted)
Max SPL for .5% THD:	140 dB
Power Requirements:	48V phantom power (+/- 4V)
Size:	47mm x 184mm/1.85 in. x 7.24 in.
Weight:	1.3 lbs/589.67g
Metal Finish:	Green with gold Grill

Polar Pattern



Frequency Response

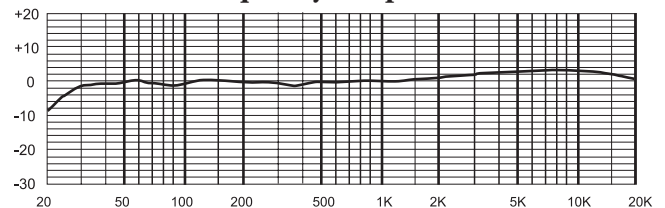

Warranty

Marshall microphones are guaranteed against defects in material and workmanship for three years from date of purchase. Should you encounter any problem with this unit, promptly contact the company you purchased it from for assistance. The original dated sales receipt will be necessary for any warranty claim. Do not send any unit directly to us without prior authorization from our service department! Warranty coverage is limited to repair or replacement (at our option) of the microphone, and does not cover incidental damages due to use of this unit, nor damage caused by accidental misuse of this product.